

Dismantling original part:

1. remove the seat
2. unscrew the screws on the inside of the rear, remove the plastic frame and rear light strip
3. remove the original number plate light from the rear light strip - this is needed for the new rear end

Mounting new rear

1. mount the rear lights and turn signals in the rear fender with suitable rear fender - also fit the original licence plate light in the new licence plate light into the new fender.

Lighting used

- Indicator LED: E4 – EC-WL013LED, 40mm (L) x 8mm(B) x 13mm(H)
- Taillight/brake light LED, E4 - EC-TL008LED, 40mm (L) x 8mm(B) x 13mm(H)



Abb. 1

2. the rear fender made of ABS plastic is placed over the original metal fender and fastened with the original screws. (Abb.1)
3. connect electrical connections
4. attach the brackets supplied to the bottom hole of the fram (see Abb.2)



Abb.2

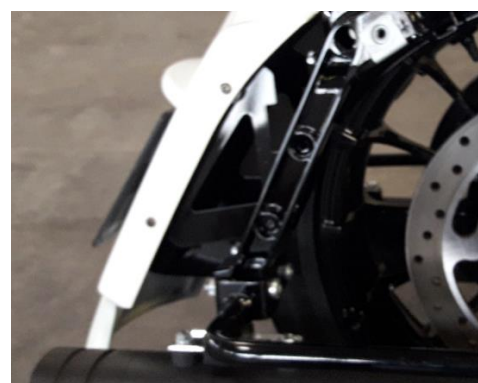


Abb.3

5. holes are drilled on both sides of the rear fender - here the rear fender is attached to the brackets and aligned. (Abb.3)
6. Finally, mount the seat again.